




Construction(mm)

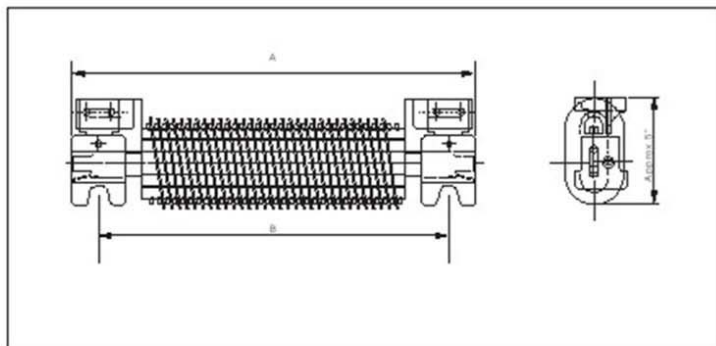


Features

- Use high quality ceramic as insulator between metal scaleboard and resistance body
- The resistance body used the extremely stable resistance alloy
- The leading out terminal and the resistance body use welding craft
- The surface temperature rise is not exceed 350°C

Reference Standards

Q/ATK070

Derating Curve

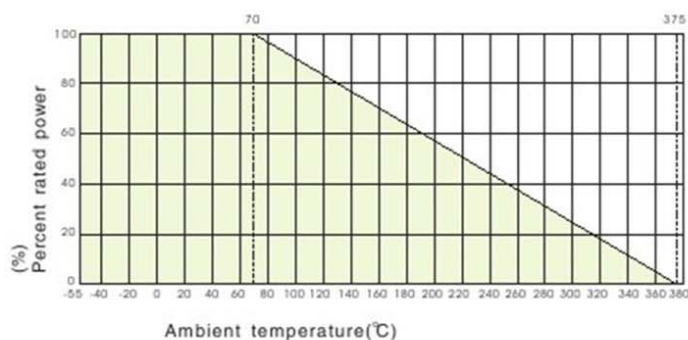

Applications

- It was often used in braking release electric circuit of large-scale machinery
- Other high power, electrical equipment

Technical Specifications

Type	Power(W)	(A)(mm) A Over-all	(B)(mm) B Mounting centers
KW-525	525	295.3	244.5
KW-850	850	385.7	334.9
KW-1200	1200	469.9	419.1
KW-1450	1450	555.6	504.8
KW-1750	1750	638.2	587.4

How to Order

Example

KW	525W	3Ω	± 10%	± 250ppm	box
Type	Power	Nominal Value	Tolerance	TCR	Packaging
KW	525W 850W 1200W 1450W 1750W	3Ω	± 10%	± 250ppm	box